


RHAS-SP V1.3-03E VIEWER

Comparison: Correction-Method: SAE

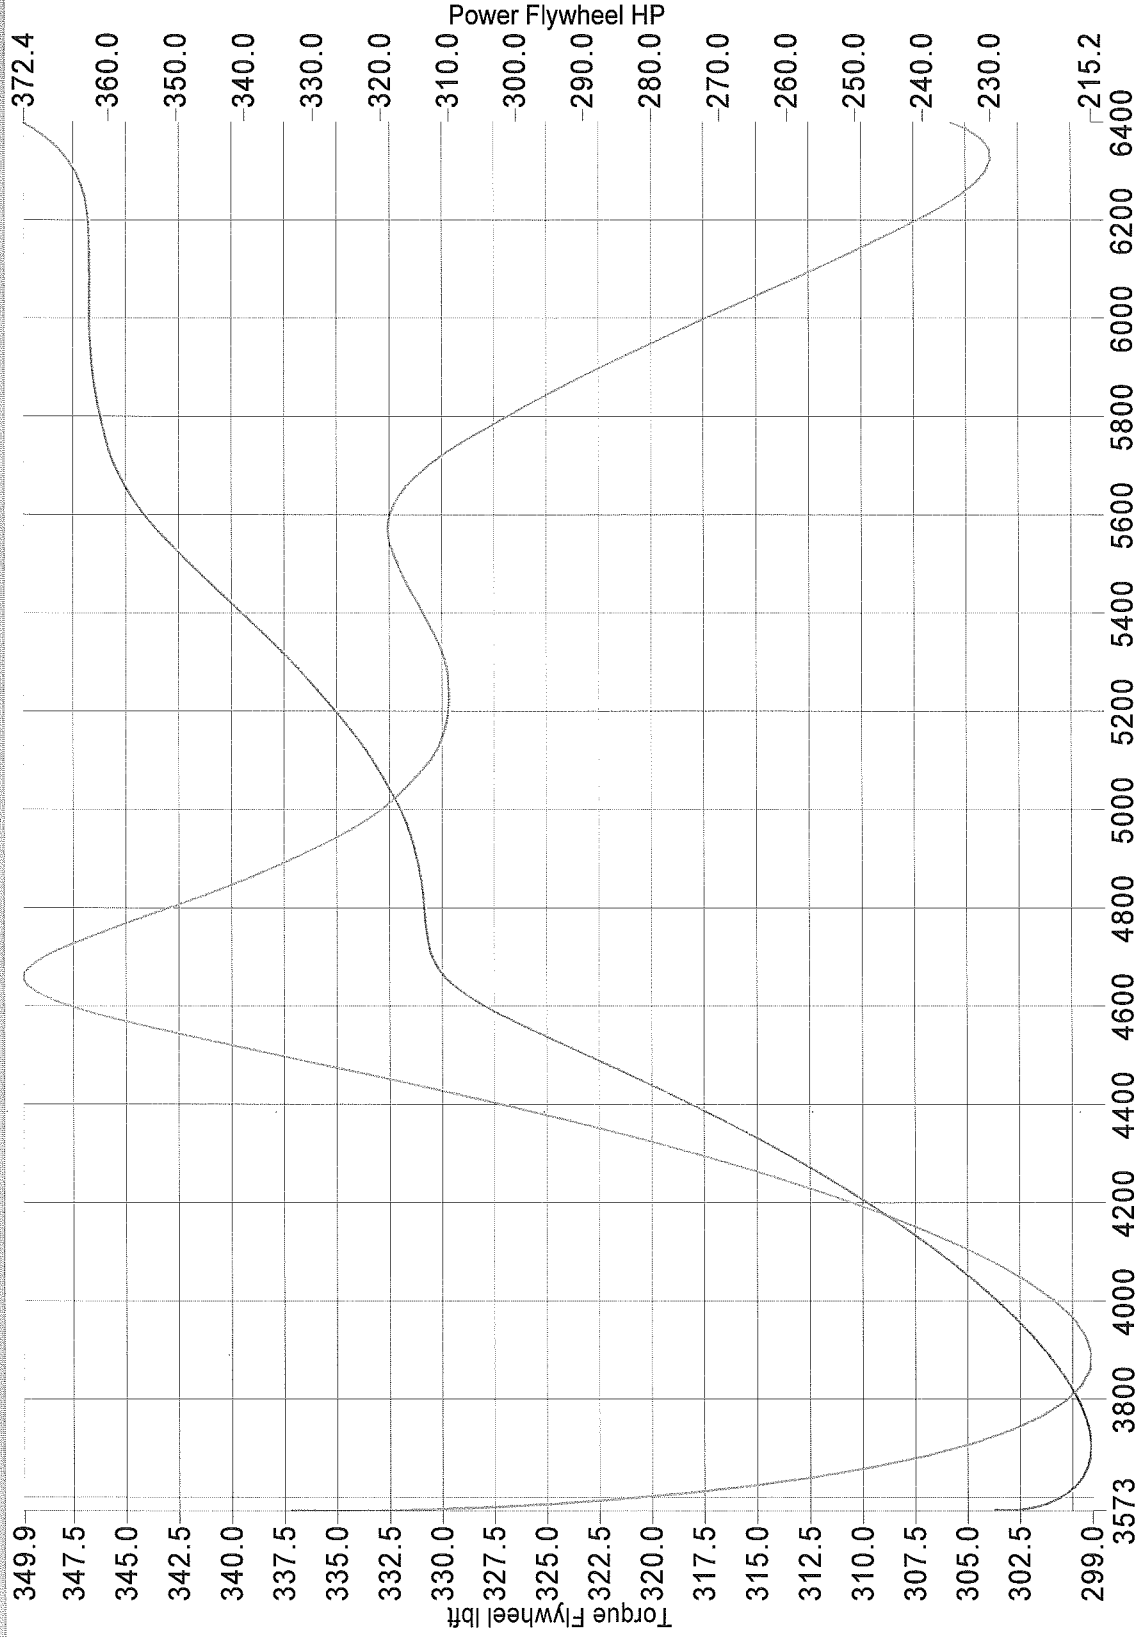

Accel	0.0716
Distance	14.7
CAP1	

Plot 1 (Thick) **X Axis** **Y Axis (Left)** **Y Axis (Right)** **Show ShowLock** **Plot 2 (Thin)**
 Comparison AP 1 Eng rpm Torque Flywhee Power Flywhee Ave. Data Cursor Log Data (LGS)

Folder: 2011 mustang 302 **Folder:**
Run ID: axback run2 **Run ID:**
Date: 30-Sep-2010 11:36:58 **Date:**

axel back 3" flow packs

Vehicle Folder: 2011 mustang 302
 Date: 30-Sep-2010
 Time: 11:36:58
 Run ID: axback run2
 Run No: 1

Correction Method: SAE

Vehicle Specification
 Wheel Diameter (mm): 600.0
 Weight (Kg): 1400.00
 Drive Ratio: 6.46300000
 Trans.C. Factor: 1.000000
 Gearbox: MANUAL
 Gear: 4
 Control Mode: CUSTOM


Run Comment:
 axel back 3" flow packs



EngRPM	TorqueFly lbft	PowFly HP	Temp °F	MAP PSI	Lambda	AFR	PCRatio P/PC	Time sec	Baro InHg	T.Effort lb
3573	335.387	228.189	72.9	-0.12	0.00	0.00	1.06420	0.033	28.807	2202.29
3600	320.765	219.865	72.7	-0.11	0.00	0.00	1.06402	0.205	28.808	2106.27
3750	302.201	215.772	72.9	-0.12	0.00	0.02	1.06420	0.441	28.808	1984.38
3900	299.081	222.086	73.0	-0.15	0.00	0.00	1.06431	0.595	28.809	1963.89
4050	302.513	233.274	73.1	-0.10	0.00	0.03	1.06445	0.731	28.809	1986.42
4200	310.436	248.249	73.1	-0.10	0.00	0.02	1.06452	0.863	28.808	2038.45
4350	322.240	266.892	73.0	-0.12	0.00	0.00	1.06434	1.000	28.807	2115.96
4500	337.621	289.273	72.9	-0.11	0.00	0.00	1.06424	1.164	28.807	2216.96
4650	349.751	309.655	73.0	-0.10	0.00	0.05	1.06441	1.424	28.807	2296.61
4800	342.960	313.456	73.0	-0.12	0.01	0.19	1.06441	1.750	28.807	2252.14
4950	334.730	315.476	72.8	-0.12	0.01	0.19	1.06417	1.992	28.806	2197.97
5100	330.528	320.956	72.8	-0.11	0.01	0.15	1.06415	2.193	28.806	2170.38
5250	329.619	329.486	72.9	-0.11	0.00	0.00	1.06428	2.379	28.807	2164.41
5400	330.823	340.139	73.0	-0.12	0.00	0.06	1.06435	2.562	28.807	2172.32
5550	332.452	351.309	73.0	-0.11	0.00	0.03	1.06430	2.755	28.808	2183.02
5700	330.614	358.808	72.8	-0.13	0.00	0.00	1.06399	2.979	28.807	2170.94
5850	324.708	361.673	72.9	-0.11	0.00	0.00	1.06415	3.220	28.808	2132.17
6000	317.401	362.599	73.0	-0.10	0.01	0.08	1.06431	3.446	28.808	2084.19
6150	309.680	362.622	73.0	-0.11	0.00	0.00	1.06432	3.660	28.808	2033.48
6300	304.009	364.664	72.9	-0.04	0.00	0.00	1.06409	3.868	28.808	1996.25
6400	305.634	372.433	72.8	-0.12	0.00	0.00	1.06398	4.020	28.808	2006.92

RHAS-SP V1.3-03E VIEWER

Comparison: Correction-Method: SAE

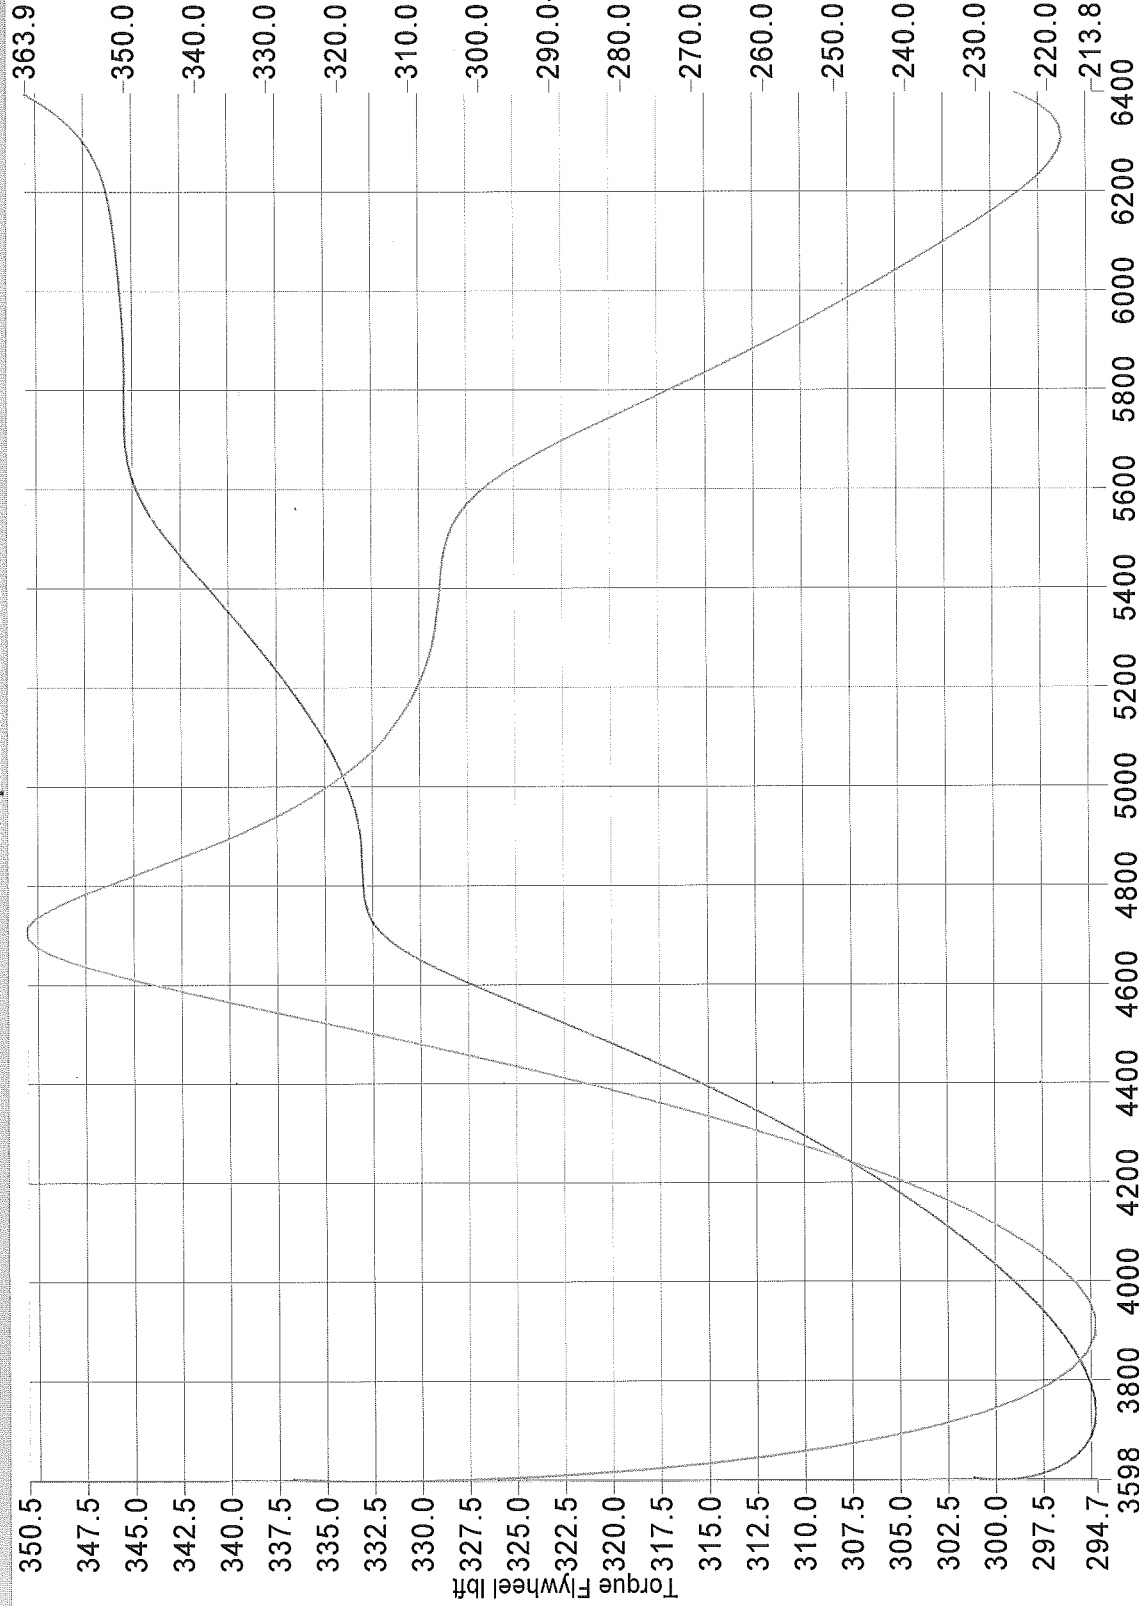

CAP2

62.1

Distance

Plot 1 (Thick) X Axis Y Axis (Left) Y Axis (Right) Plot 2 (Thin) Show ShowLock Ave. Data Cursor

Comparison AP 2 Eng rpm Torque Flywheel Power Flywheel Log Data (LGS)

Folder: 2011 mustang 302

Run ID: stock run3

Date: 28-Sep-2010 18:47:43

Folder:

Run ID:

Date:

Vehicle Folder: 2011 mustang 302
 Date: 28-Sep-2010
 Time: 18:47:43
 Run ID: stock run3
 Run No: 2

Correction Method: SAE

Run Comment:

Vehicle Specification
 Wheel Diameter (mm): 600.0
 Weight (Kg): 1400.00
 Drive Ratio: 6.46300000
 Trans.C. Factor: 1.000000
 Gearbox: MANUAL
 Gear: 4
 Control Mode: CUSTOM



EngRPM	TorqFLY lbft	PowFLY HP	Temp °F	MAP PSI	Lambda	AFFR	PCRatio P/PC	Time sec	Baro InHg	T.Effort lb
3600	335.340	229.850	72.9	-0.10	0.00	0.00	1.06400	0.032	28.811	2201.98
3750	299.526	213.862	73.0	-0.13	0.00	0.00	1.06423	0.444	28.812	1966.81
3900	294.715	218.844	72.6	-0.04	0.00	0.00	1.06371	0.599	28.811	1935.22
4050	297.330	229.277	72.7	-0.12	0.00	0.00	1.06386	0.738	28.811	1952.39
4200	304.683	243.648	73.1	-0.12	0.00	0.00	1.06439	0.873	28.811	2000.67
4350	316.421	262.072	73.2	-0.09	0.00	0.00	1.06456	1.008	28.811	2077.75
4500	332.250	284.672	73.1	-0.11	0.00	0.00	1.06446	1.161	28.811	2181.69
4650	348.428	308.484	73.1	-0.12	0.00	0.00	1.06437	1.383	28.811	2287.92
4800	346.360	316.545	73.0	-0.11	0.00	0.00	1.06427	1.723	28.812	2274.34
4950	336.986	317.602	73.1	-0.10	0.00	0.00	1.06447	1.991	28.812	2212.79
5100	331.749	322.141	73.0	-0.12	0.01	0.14	1.06436	2.199	28.812	2178.40
5250	329.540	329.408	72.8	-0.12	0.00	0.00	1.06406	2.387	28.812	2163.90
5400	328.855	338.115	72.4	-0.11	0.00	0.00	1.06348	2.577	28.812	2159.39
5550	327.820	346.427	72.8	-0.10	0.00	0.00	1.06409	2.784	28.812	2152.60
5700	322.321	349.808	73.1	-0.13	0.00	0.00	1.06458	3.020	28.812	2116.49
5850	314.131	349.891	73.2	-0.10	0.01	0.08	1.06472	3.244	28.811	2062.71
6000	306.785	350.471	72.9	-0.12	0.00	0.06	1.06431	3.454	28.811	2014.48
6150	300.299	351.638	72.4	-0.10	0.01	0.15	1.06364	3.657	28.811	1971.88
6300	296.259	355.369	72.9	-0.07	0.00	0.00	1.06430	3.855	28.811	1945.36
6400	298.616	363.881	73.2	-0.11	0.01	0.14	1.06482	3.999	28.810	1960.83