


RHAS-SP V1.3-03E VIEWER

Comparison: Correction-Method: SAE

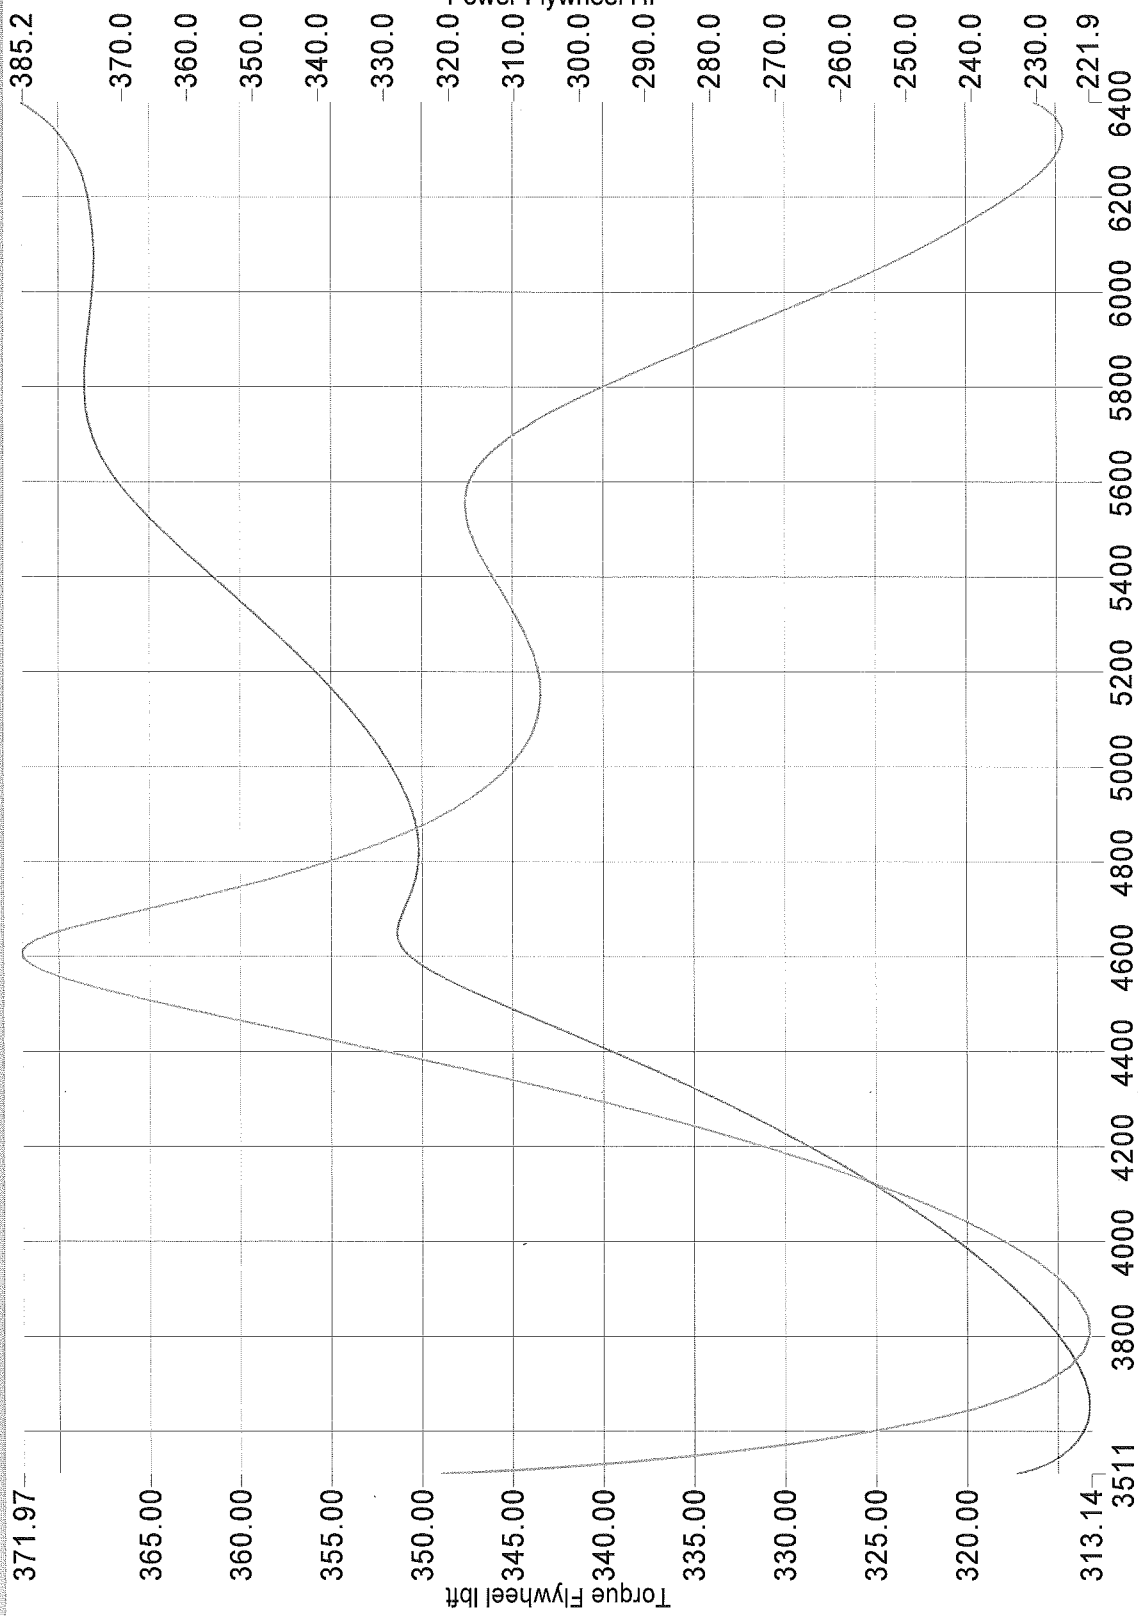

CAP1
 0.1254
 55.8
 Distance

Plot 1 (Thick) **X Axis** **Y Axis (Left)** **Y Axis (Right)** **Plot 2 (Thin)**
 Comparison AP 1 Eng rpm Torque Flywheel Power Flywheel Show ShowLock Ave. Data Cursor
 NONE

Folder: 2011musthsystem Folder:
Run ID: run1hpipe Run ID:
Date: 30-Sep-2010 18:59:49 Date:

3" cat back H pipe system

Vehicle Folder: 2011musthsystem
 Date: 30-Sep-2010
 Time: 18:59:49
 Run ID: run1hpipe
 Run No: 1

Vehicle Specification
 Wheel Diameter (mm): 600.0
 Weight (Kg): 1400.00
 Drive Ratio: 6.46300000
 Trans.C. Factor: 1.000000
 Gearbox: MANUAL
 Gear: 4
 Control Mode: CUSTOM

Run Comment:
 3" cat back H pipe system


Correction Method: SAE



EngRPM	TorqFly lbft	PowFly HP	Temp °F	MAP PSI	Lambda	AFR	PCRatio P/PC	Time sec	Baro InHg	T.Effort lb
3511	348.884	233.216	78.7	-0.12	0.00	0.04	1.05820	0.000	29.016	2290.91
3600	325.236	222.941	78.9	-0.10	0.01	0.08	1.05833	0.263	29.017	2135.63
3750	313.961	224.168	78.8	-0.12	0.00	0.04	1.05832	0.440	29.017	2061.59
3900	314.285	233.375	78.7	-0.19	0.01	0.09	1.05812	0.574	29.018	2063.72
4050	320.397	247.065	78.5	-0.11	0.01	0.10	1.05785	0.696	29.017	2103.86
4200	331.033	264.721	78.4	-0.12	0.00	0.03	1.05777	0.821	29.017	2173.70
4350	346.029	286.595	78.7	-0.16	0.01	0.13	1.05812	0.963	29.017	2272.17
4500	363.974	311.852	79.0	-0.11	0.00	0.03	1.05847	1.152	29.017	2390.00
4650	370.234	327.790	79.0	-0.12	0.01	0.08	1.05843	1.480	29.018	2431.11
4800	355.111	324.576	78.7	-0.12	0.00	0.00	1.05817	1.802	29.016	2331.80
4950	346.692	326.750	79.0	-0.10	0.00	0.00	1.05849	2.017	29.017	2276.52
5100	343.603	333.652	79.1	-0.16	0.00	0.00	1.05860	2.200	29.018	2256.24
5250	343.922	343.784	79.1	-0.13	0.00	0.00	1.05864	2.373	29.016	2258.33
5400	346.016	355.759	78.9	-0.12	0.00	0.00	1.05841	2.551	29.016	2272.08
5550	347.529	367.241	78.6	-0.13	0.00	0.00	1.05810	2.755	29.017	2282.02
5700	344.867	374.277	78.8	-0.11	0.00	0.00	1.05828	2.994	29.017	2264.54
5850	337.033	375.400	78.9	-0.12	0.00	0.04	1.05842	3.236	29.017	2213.09
6000	327.612	374.263	78.8	-0.11	0.01	0.16	1.05834	3.460	29.017	2151.23
6150	319.698	374.354	78.5	-0.12	0.00	0.07	1.05791	3.666	29.015	2099.27
6300	314.730	377.525	78.7	-0.12	0.02	0.29	1.05829	3.864	29.014	2066.65
6400	316.094	385.179	78.9	-0.12	0.00	0.00	1.05848	4.011	29.014	2075.60

RHAS-SP V1.3-03E VIEWER

Comparison: Correction-Method: SAE

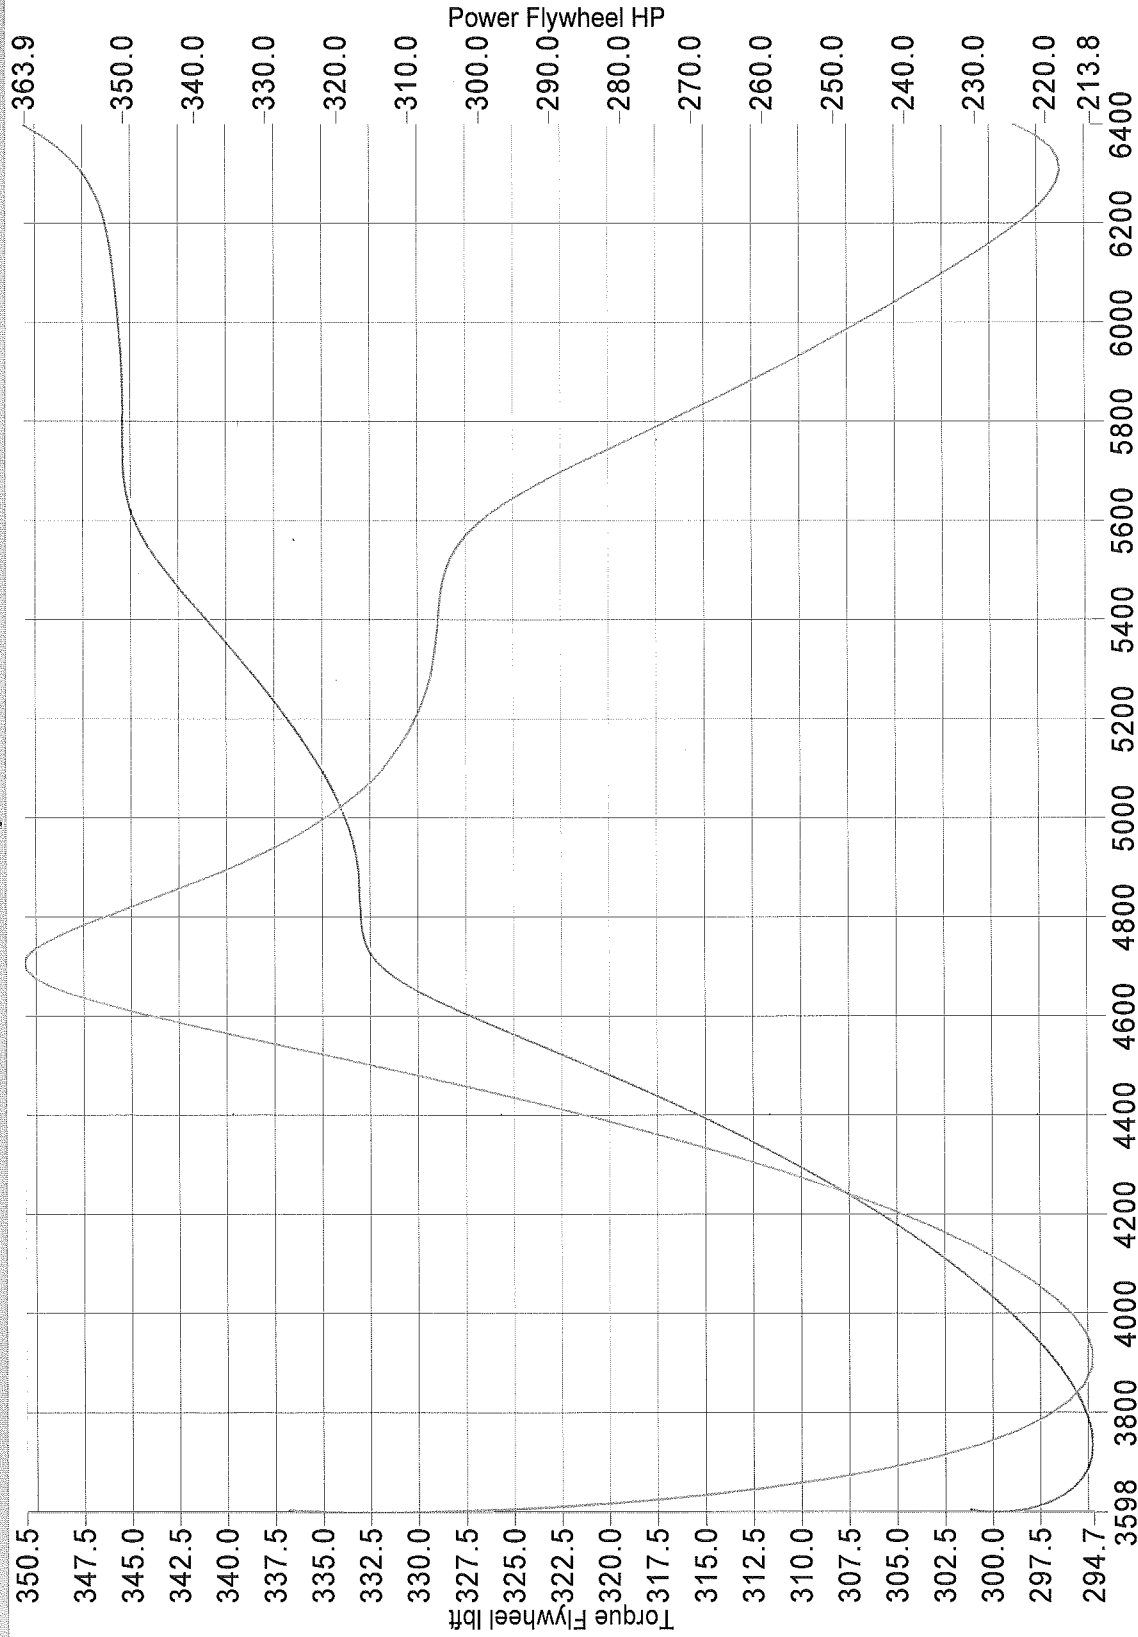

CAP2

Distance
62.1

Plot 1 (Thick) X Axis Y Axis (Left) Y Axis (Right) Plot 2 (Thin) Show ShowLock Ave. Data Cursor

Comparison AP 2 Eng rpm Torque Flywheel Power Flywheel Log Data (LGS)

Folder: 2011 mustang 302
 Run ID: stock run3
 Date: 28-Sep-2010 18:47:43

Folder:
 Run ID:
 Date:

Vehicle Folder: 2011 mustang 302
 Date: 28-Sep-2010
 Time: 18:47:43
 Run ID: stock run3
 Run No: 2

Correction Method: SAE

Run Comment:

Vehicle Specification
 Wheel Diameter (mm): 600.0
 Weight (Kg): 1400.00
 Drive Ratio: 6.46300000
 Trans.C. Factor: 1.000000
 Gearbox: MANUAL
 Gear: 4
 Control Mode: CUSTOM



EngRPM	TorqFly lbft	PowFly HP	Temp °F	MAP PSI	Lambda	AFR	PCRatio P/PC	Time sec	Baro InHg	T.Effort lb
3600	335.340	229.850	72.9	-0.10	0.00	0.00	1.06400	0.032	28.811	2201.98
3750	299.526	213.862	73.0	-0.13	0.00	0.05	1.06423	0.444	28.812	1966.81
3900	294.715	218.844	72.6	-0.04	0.00	0.06	1.06371	0.599	28.811	1935.22
4050	297.330	229.277	72.7	-0.12	0.00	0.01	1.06386	0.738	28.811	1952.39
4200	304.683	243.648	73.1	-0.12	0.00	0.05	1.06439	0.873	28.811	2000.67
4350	316.421	262.072	73.2	-0.09	0.00	0.01	1.06456	1.008	28.811	2077.75
4500	332.250	284.672	73.1	-0.11	0.00	0.06	1.06446	1.161	28.811	2181.69
4650	348.428	308.484	73.1	-0.12	0.00	0.03	1.06437	1.383	28.811	2287.92
4800	346.360	316.545	73.0	-0.11	0.00	0.07	1.06427	1.723	28.812	2274.34
4950	336.986	317.602	73.1	-0.10	0.00	0.02	1.06447	1.991	28.812	2212.79
5100	331.749	322.141	73.0	-0.12	0.01	0.14	1.06436	2.199	28.812	2178.40
5250	329.540	329.408	72.8	-0.12	0.00	0.00	1.06406	2.387	28.812	2163.90
5400	328.855	338.115	72.4	-0.11	0.00	0.05	1.06348	2.577	28.812	2159.39
5550	327.820	346.427	72.8	-0.10	0.00	0.00	1.06409	2.784	28.812	2152.60
5700	322.321	349.808	73.1	-0.13	0.00	0.00	1.06458	3.020	28.812	2116.49
5850	314.131	349.891	73.2	-0.10	0.01	0.08	1.06472	3.244	28.811	2062.71
6000	306.785	350.471	72.9	-0.12	0.00	0.06	1.06431	3.454	28.811	2014.48
6150	300.299	351.638	72.4	-0.10	0.01	0.15	1.06364	3.657	28.811	1971.88
6300	296.259	355.369	72.9	-0.07	0.00	0.00	1.06430	3.855	28.811	1945.36
6400	298.616	363.881	73.2	-0.11	0.01	0.14	1.06482	3.999	28.810	1960.83